


TECHNICAL DATA SHEET

MODEL

TATLIN

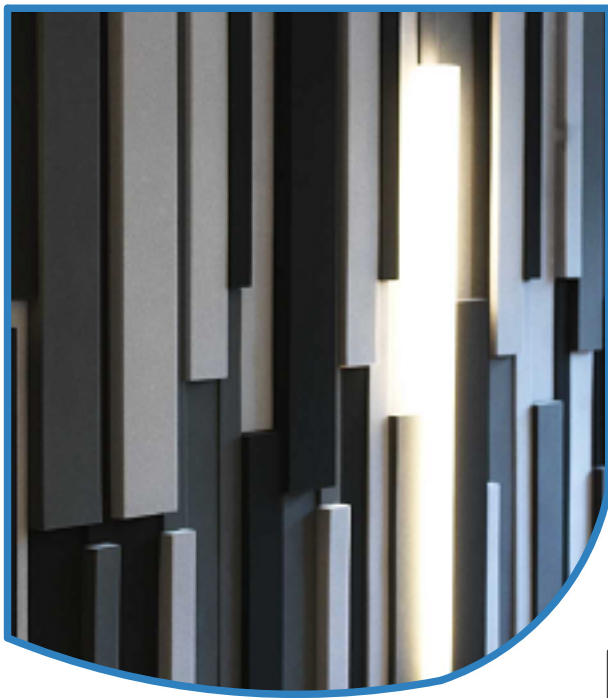

Combine multiple units to create the required pattern.

Acoustic Unit	L	W	H
TAT60-1	200	60	60
TAT60-2	600	60	80
TAT60-3	1000	60	60
TAT60-4	1400	60	80
TAT100-1	375	100	45
TAT100-2	750	100	75
TAT100-3	825	100	55
TAT100-4	850	100	55
TAT100-5	1275	100	65
TAT140-1	640	140	50
TAT140-2	720	140	50
TAT140-3	960	140	90
TAT140-4	1440	140	70

Light unit	1200	60	100
-------------------	------	----	-----

TYPE AND FINISH

Size	Type	Finish
See table	Acoustic wall or ceiling model with separate light unit	Flock

Base material	Sound absorption foam
Flock colour	See colour chart
Light source	Talex module stark LLE 280 400 mA, 6200 lumen, 36 Watt
Colour temperature	3000 or 4000 K
Options	Standard DALI and switch dimmable with integrated corridor function

Sound absorption foam

NRC 0,9

Absorption area RT60 frequency 250-2000Hz

On request